




SSAC74G16S

Anti-Parallel Thyristor-Thyristor Modules(Solid State AC Switches)

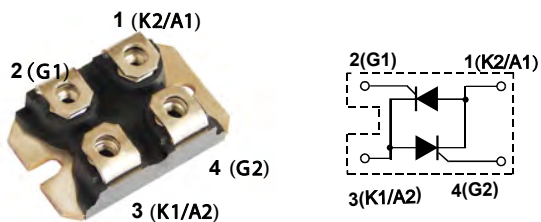

Dimensions SOT-227(ISO TOP)

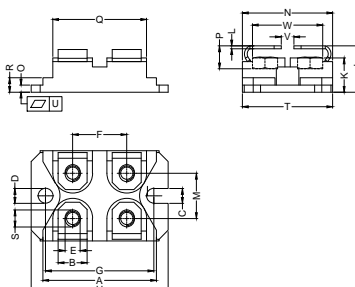

Dim.	Millimeter		Dim.	Millimeter	
	Min.	Max.		Min.	Max.
A	31.30	31.65	M	12.00	13.00
B	7.80	8.40	N	25.15	25.65
C	4.00	4.30	O	1.95	2.15
D	∅4.00	∅4.30	P	5.60	6.60
E	4.00	4.30	Q	25.30	26.30
F	14.90	15.20	R	3.90	4.30
G	30.10	30.30	S	4.45	4.85
H	38.00	38.50	T	24.50	25.10
J	12.10	12.90	U	0.05	0.10
K	9.00	9.60	V	3.00	4.80
L	0.75	0.85	W	19.30	20.50

Type	V _{RSM}	V _{RRM}
	V _{DSM}	V _{DRM}
	V	V
SSAC74G08S	800	800
SSAC74G12S	1200	1200
SSAC74G14S	1400	1400
SSAC74G16S	1600	1600
SSAC74G18S	1800	1800

Symbol	Test Conditions	Maximum Ratings	Unit
I_{RMS}	T _C = 110°C, 50 - 400 Hz, module	74	
I_{TRMS}	T _{VJ} = T _{VJM}	53	A
I_{TAVM}	T _C = 110°C; (180 ° sine)	34	
I_{TSM}	T _{VJ} = 45°C V _R = 0 t = 10ms (50Hz), sine t = 8.3ms (60Hz), sine	600 640	A
	T _{VJ} = T _{VJM} V _R = 0 t = 10ms(50Hz), sine t = 8.3ms(60Hz), sine	520 560	
i²t	T _{VJ} = 45°C V _R = 0 t = 10ms (50Hz), sine t = 8.3ms (60Hz), sine	1800 1720	A ² s
	T _{VJ} = T _{VJM} V _R = 0 t = 10ms(50Hz), sine t = 8.3ms(60Hz), sine	1350 1320	
(di/dt)_{cr}	T _{VJ} = T _{VJM} f = 50Hz, t _p = 200us V _D = 2/3V _{DRM} I _G = 0.3A	repetitive, I _T = 150A 500	A/us
	non repetitive, I _T = I _{TAVM} di _G /dt = 0.3A/us	100	
(dv/dt)_{cr}	T _{VJ} = T _{VJM} ; R _{GK} = ∞; method 1 (linear voltage rise)	V _{DR} = 2/3V _{DRM} 1000	V/us
P_{GM} P_{GAVM}	T _{VJ} = T _{VJM} I _T = I _{TAVM}	t _p = 30us 5	W
		t _p = 300us 0.5	
V_{RGM}		10	V
T_{VJ} T_{VJM} T_{stg}		-40...+150	°C
		150	
		-40...+150	
V_{ISOL}	50/60Hz, RMS I _{ISOL} ≤ 1mA	2500	V~
M_d	Mounting torque (M4)	1.1-1.5/9-13	Nm/lb.in.
	Terminal connection torque (M4)	1.1-1.5/9-13	
Weight	typical	30	g



SSAC74G16S

Anti-Parallel Thyristor-Thyristor Modules(Solid State AC Switches)

Symbol	Test Conditions	Characteristic Values	Unit
I_R, I_D	$T_{VJ}=T_{VJM}; V_R=V_{RRM}; V_D=V_{DRM}$	≤ 12	mA
V_T	$I_T=80A; T_{VJ}=25^{\circ}C$	≤ 1.58	V
V_{TO}	For power-loss calculations only	≤ 0.85	V
r_T		≤ 8.4	m Ω
V_{GT}	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	≤ 1.5 ≤ 1.6	V
I_{GT}	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	≤ 100 ≤ 150	mA
V_{GD}	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	≤ 0.2	V
I_{GD}		≤ 5	mA
I_L	$T_{VJ}=25^{\circ}C; t_p=10\mu s$ $I_G=0.3A; di/dt=0.3A/\mu s$	≤ 250	
I_H	$T_{VJ}=25^{\circ}C; V_D=6V; R_{GK}=\infty$	≤ 100	
t_{gd}	$T_{VJ}=25^{\circ}C; V_D=1/2V_{DRM}$ $I_G=0.3A; di/dt=0.3A/\mu s$	≤ 2	us
t_q	$T_{VJ}=T_{VJM}; I_T=20A; t_p=200\mu s; di/dt=-10A/\mu s$ $V_R=100V; dv/dt=15V/\mu s; V_D=2/3V_{DRM}$ typ.	≤ 150	
R_{thJC}	per thyristor; DC current per module	≤ 0.71 ≤ 0.355	K/W
R_{thCH}	per thyristor; DC current per module typ. typ.	≤ 0.1 ≤ 0.05	
d_s	Creeping distance on surface	≤ 8	mm
d_A	Creepage distance in air	≤ 4	
a	Max. allowable acceleration	≤ 50	m/s ²

FEATURES

- * Thyristor controller for AC for mains frequency
- * International standard package SOT-227
- * Isolation voltage 2500V~
- * Glass passivated chips
- * UL File NO. E310749
- * RoHS compliant

APPLICATIONS

- * Switching and control of single and three phase AC Softstart
- * AC motor controller
- * Solid state Switches
- * Light and temperature control

ADVANTAGES

- * Easy to mount with two screws
- * Space and weight savings
- * Improved temperature and power cycling
- * High power density



SSAC74G16S

Anti-Parallel Thyristor-Thyristor Modules(Solid State AC Switches)

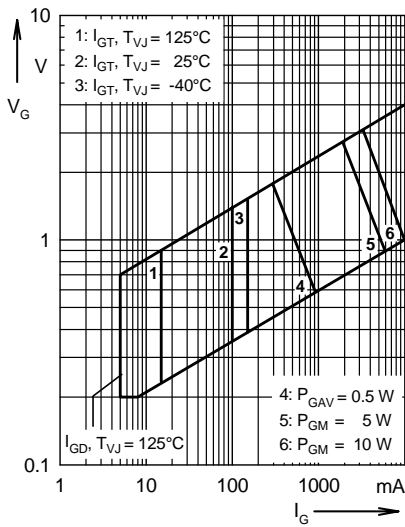


Fig. 1 Gate trigger characteristics

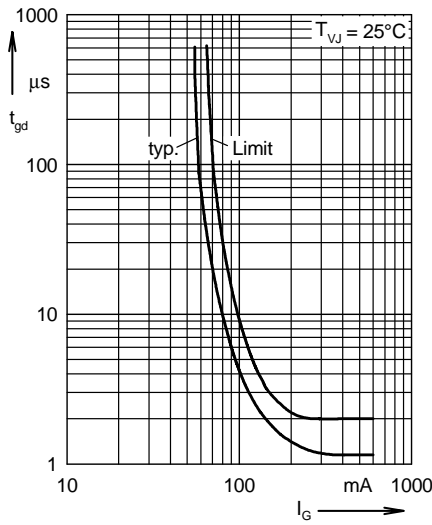


Fig. 2 Gate trigger delay time

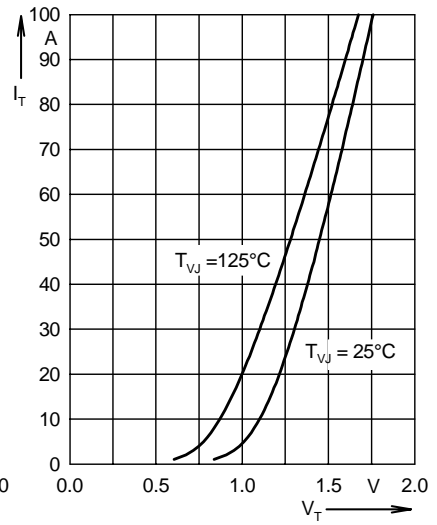


Fig. 3 Forward current versus voltage drop per leg

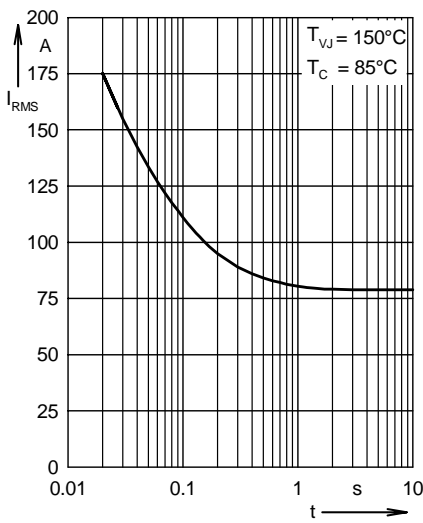


Fig. 4 Rated RMS current versus time (360° conduction)

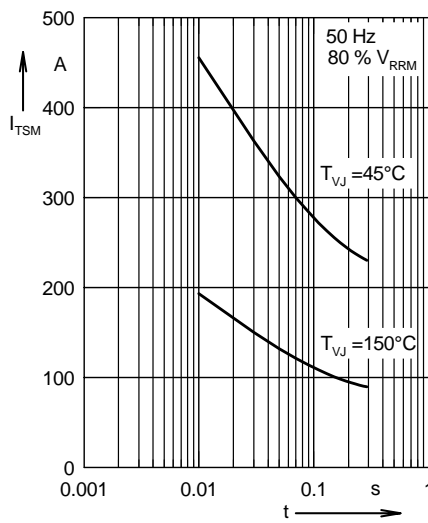


Fig. 5 Surge overload current

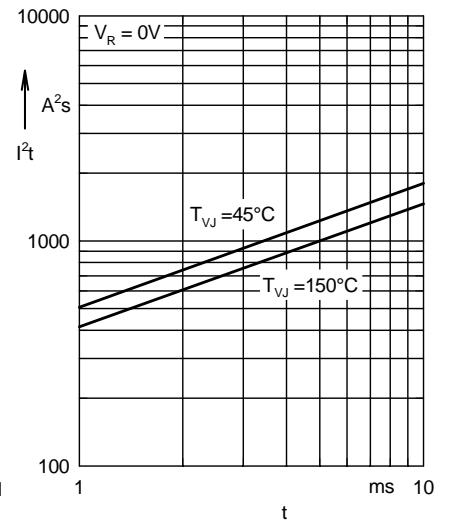


Fig. 6 I^2t versus time (per thyristor)

SSAC74G16S

Anti-Parallel Thyristor-Thyristor Modules(Solid State AC Switches)

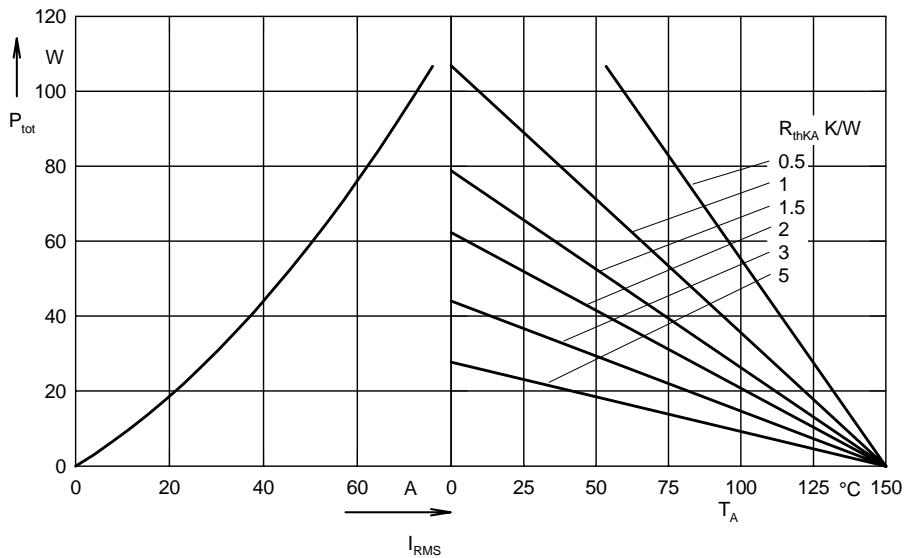


Fig. 7 Load current capability for single AC controller; 1 x SSAC74

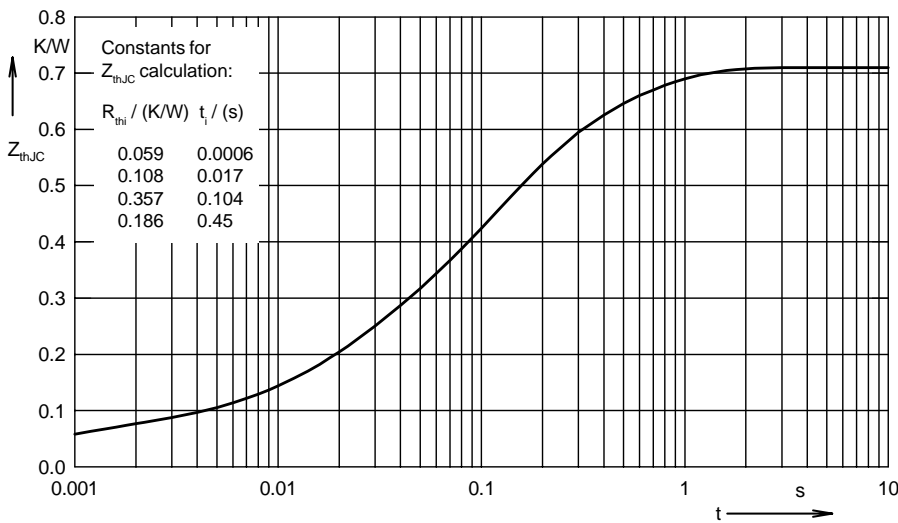


Fig. 8 Transient thermal impedance junction to case (per thyristor)

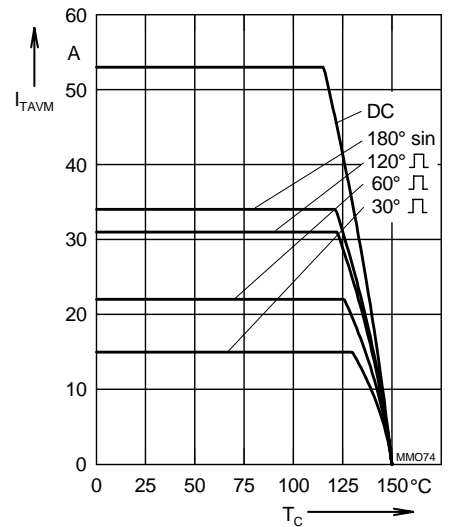


Fig. 9 Maximum forward current at case temperature